


# TECHNICAL INFORMATION

*Excellent Adhesive Strength Double Coated Adhesive Tape*

## DAITAC #810HD

#810HD is certified UL969. [File No.MH-12834]

### CONSTRUCTION

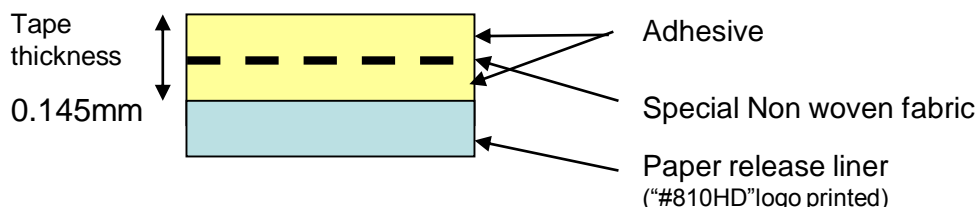

### CHARACTERISTIC

- Excellent adhesion to various plastic material and metal
- Good adhesion to polyolefin plastic which are generally difficult to be adhered
- Dimensional stable backing provides excellent stability at tape application
- Good repulsion resistance and good heat resistance
- Black type, also available(#810HD Black)
- The six hazardous materials restricted by the RoHS directive are not compounded

### APPLICATION

- For attaching a variety of materials in the automotive and electrical industry
- For attaching polyurethane foam, polyethylene form

### PROPERTY

		Unit	# 8 1 0 H D
Peel strength at 180° angle	SUS	N/20mm	1 5 . 2
	ABS		1 4 . 7
	HIPS		1 4 . 2
	PP		1 2 . 5
Holding power (40°C, 1kg)		mm/h	1 >
Ball tack		No	8
Adhesive strength at 90° angle and constant stress 23°C, 0.3kg/10mm	SUS		9
	ABS		9

### STANDARD SIZE

1060mm in max width / 50m in length