


TECHNICAL INFORMATION

Foam Based Double Coated Adhesive Tape

DAITAC #8400 Series

CONSTRUCTION

Tape Thickness
0.2mm ~ 1.2mm

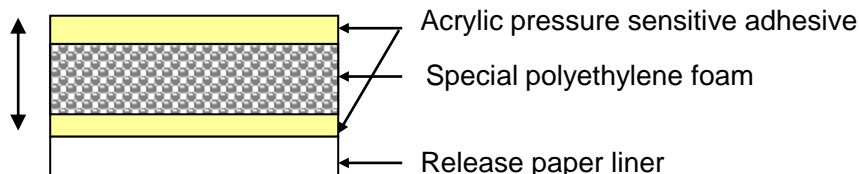

CHARACTERISTIC

- Excellent conformability
- Excellent adhesion to polyolefin, uneven surface, rough surface
- Good workability
- Tape thickness 0.2, 0.4, 0.8, 1.2mm also available

APPLICATION

- For emblems, panels, various building materials
- For exterior parts of automobiles like side visor
- For various interior parts of automobiles

PROPERTY

	Units	#8402BLACK	#8404BLACK	#8408BLACK	#8412BLACK	
Tape thickness	mm	0.2 (0.15~0.25)	0.4 (0.3~0.42)	0.8 (0.7~0.11)	1.2 (1.0~1.5)	
Peel strength at 180° angle (Conform to JIS Z0237)	SUS	15.0	19.6	19.6	19.6	
	PP	10.0	11.8	11.8	11.8	
Shear adhesive strength	SUS	N/cm ²	80	83	88	98
Holding power (40°C, 1kg)	mm/h	2>	2>	2>	2>	

STANDARD SIZE

Max. width ; #8402BLACK and #8404BLACK : 980mm
#8408BLACK and #8412BLACK : 960mm