


TECHNICAL INFORMATION

Stretch & de-bondable Double Coated Tape

DSA800

Construction

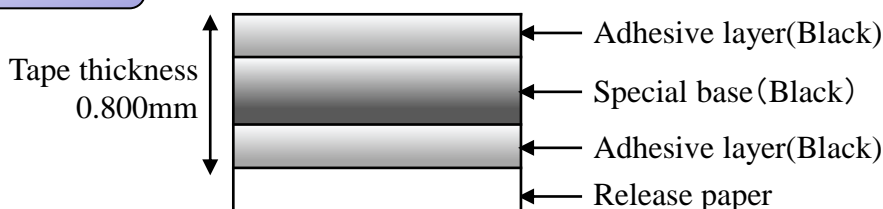

Characteristic

- Easy removability by stretching the tape.
- Excellent adhesion.

Application

- For fixing glass panel
- For fixing large rigid materials

Property

	Unit	DSA800
tape thickness	mm	0.800
Peel strength, after 24h SUS(Hairline surface)	N / 20mm	20
Holding power SUS, 1kg, 70°C	hrs.	24<
Removability	-	good

Standard size

width : 1000mm *STD Length* : 20m